

## Tools

Philips Screwdriver

Allen Key (supplied)

## Check List

Familiarise yourself with the contents

Check there is nothing missing

Check you have all the tools required

Make room to assemble the product

## Assembly Instructions


### MOBILE QUARTER ROUND UNITS

Code: QRU/1 (CURVE IN)


Code: QRU/2 (CURVE OUT)

Before starting to assemble this unit please read the step by step assembly instructions carefully.

QRU/1


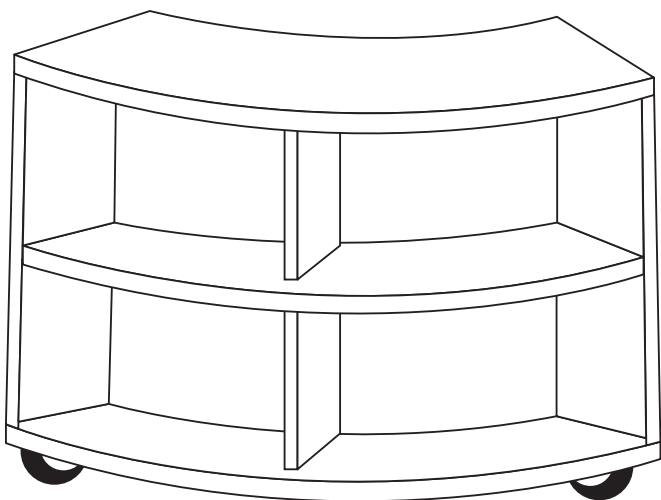




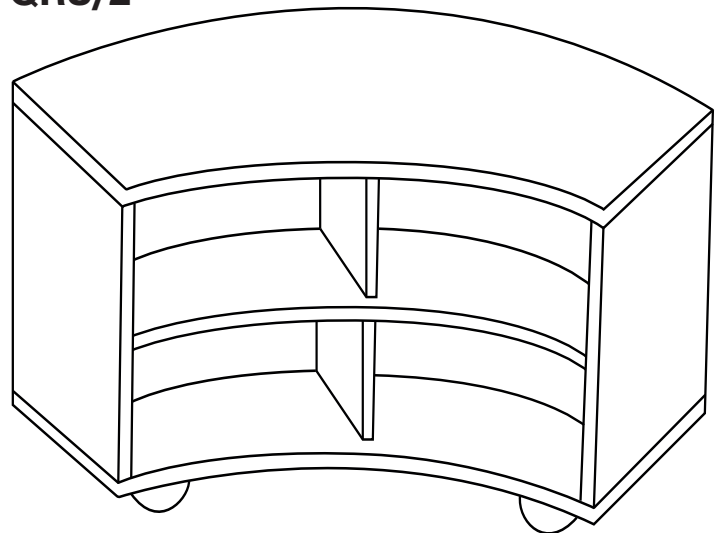


QRU/2







Contact Number  
**0151 479 3030**

## QRU/1 (CURVE IN) ASSEMBLY INSTRUCTIONS

Components		Quantity
Confirmat Screws		16
30mm x 6mm Dowel		1
1/2" x 8 Gauge Screw		16
Castor lockable		2
Castor freewheel		2
Allen Key		1
Glue		1
Metal Link Bolts		2

**IMPORTANT** Apply a small amount of glue  
in to dowel holes before dowels are inserted


**Contact Number**  
**0151 479 3030**

Panels	Quantity	Size (mm)
	2	620x298mm
	2	1015x310mm
	1	1000x270mm
	2	302x260mm
	1	704x620mm

**IMPORTANT** Panels lettered for identification if spare part is required.  
Please also state colour.


## Step 1

Tap dowel through hole to protrude equal on both sides.

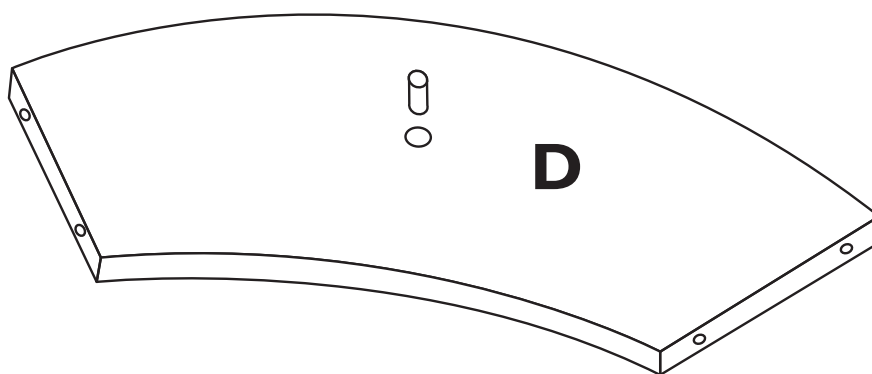

## Step 2


Secure (4) castors to bottom using ½" x 8 Gauge Screws in to "Pop" Marks (Lockable castor to front).

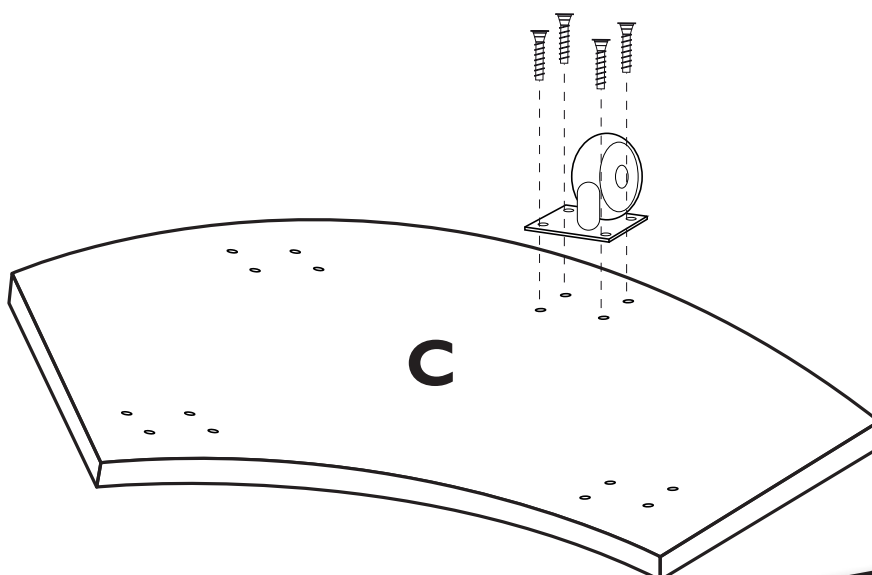

Contact Number  
**0151 479 3030**

## Step 3


Secure end and Divider to bottom with (4) Confirmat Screws.

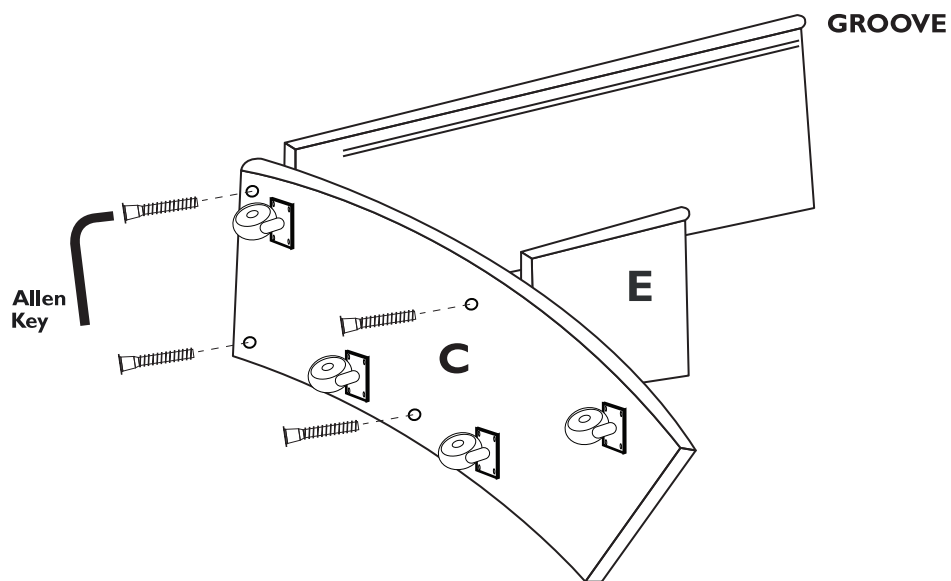

## Step 4


A) Press Shelf D with dowel in to slot in Divider E. Secure to End Panel with (2) Confirmat Screws.

B) Secure End to Bottom and Shelf with (4) Confirmat Screws.

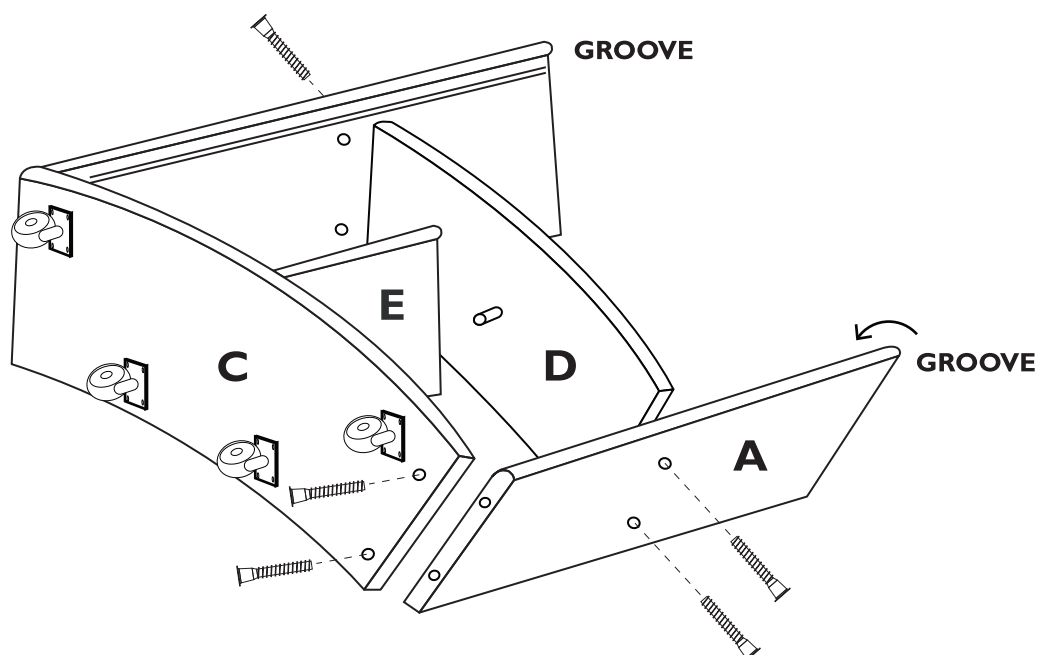


## Step 5

Flex hardboard back in to grooves in Ends and push down.

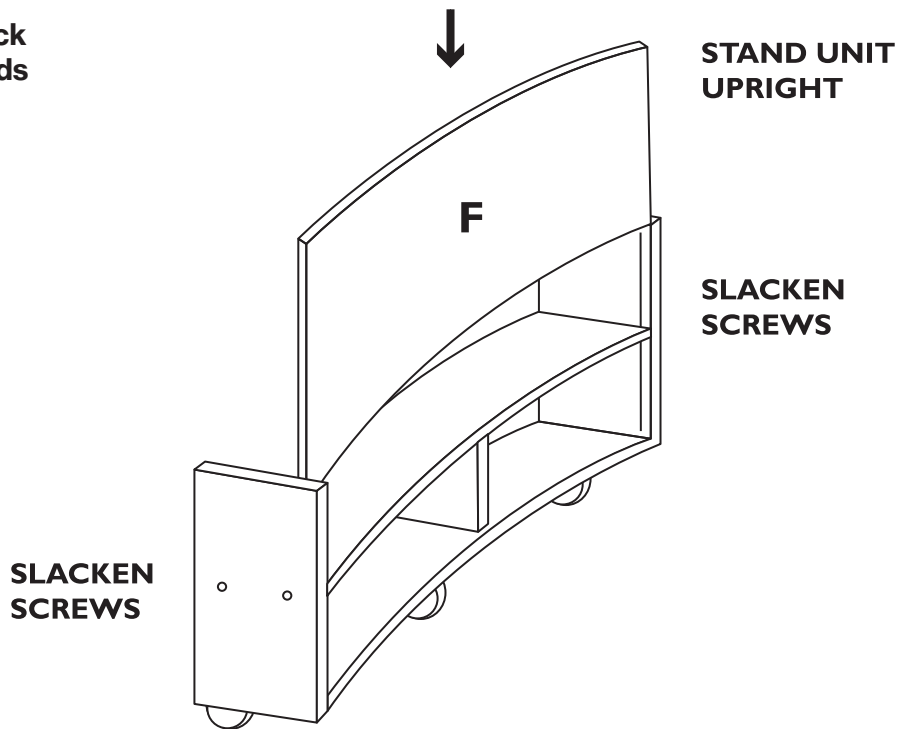


## Step 6

- A) Press Divider into Dowel ALREADY IN SHELF.
- B) Position Top and secure to Ends and Dividers with (6) Confirmat Screws.

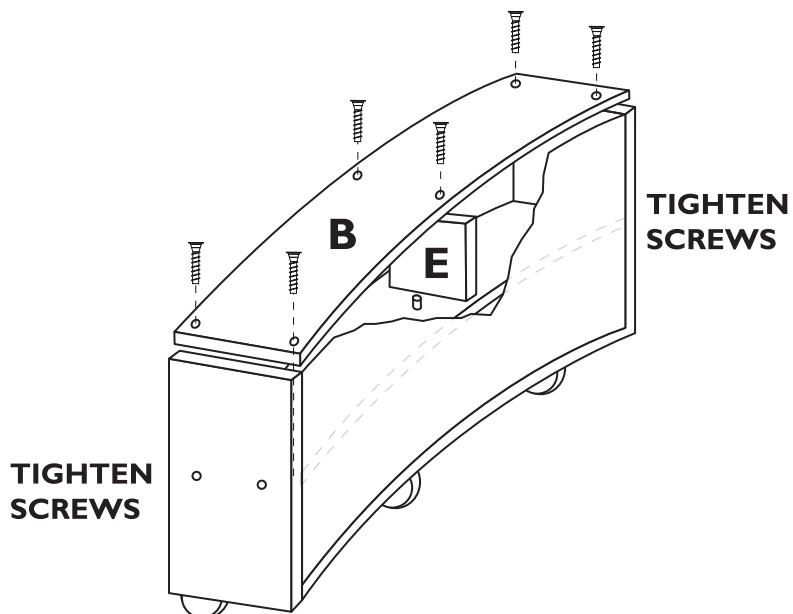

**Step 7 (If Required)**





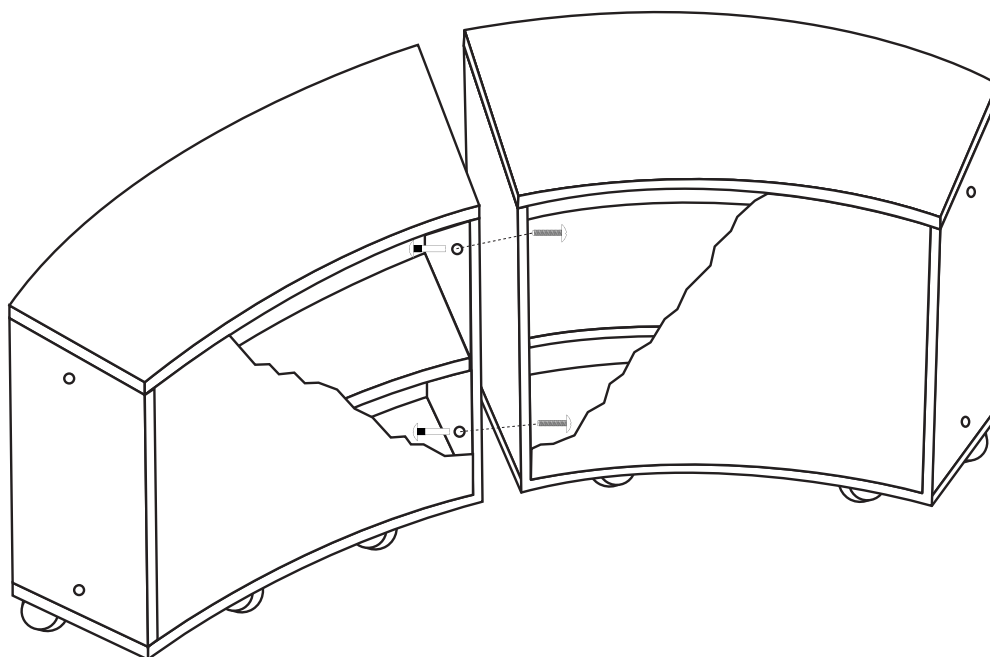


Use Metal Connecting Bolts to join units together.



**YOUR QRU/1 UNIT IS NOW COMPLETE**

**Contact Number  
0151 479 3030**

## QRU/2 (CURVE OUT) ASSEMBLY INSTRUCTIONS






Components		Quantity
Confirmat Screws		16
30mm x 6mm Dowel		1
1/2" x 8 Gauge Screw		16
Castor lockable		2
Castor freewheel		2
Allen Key		1
Glue		1
Metal Link Bolts		2

**IMPORTANT** Apply a small amount of glue  
in to dowel holes before dowels are inserted

**Contact Number**  
**0151 479 3030**




# Profile Education

Panels	Quantity	Size (mm)
	2	620x298mm
	2	1070x460mm
	1	1015x410mm
	2	302x257mm
	1	1131x630mm

**IMPORTANT** Panels lettered for identification if spare part is required.  
Please also state colour.


## Step 1

Tap dowel through hole to protrude equal on both sides.

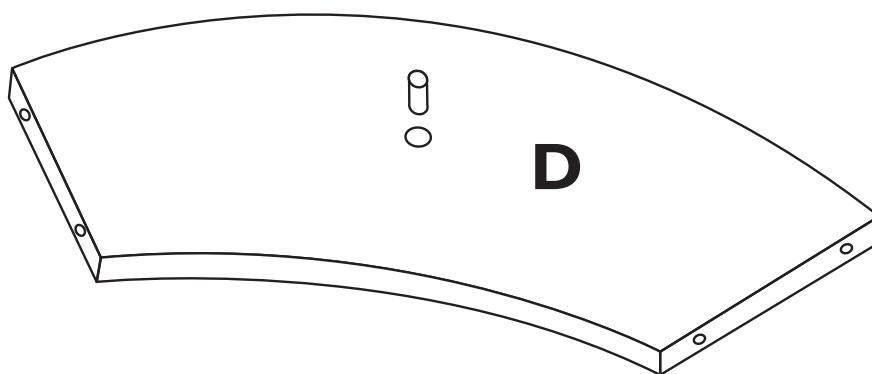

## Step 2


Secure (4) castors to bottom using ½" x 8 Gauge Screws in to "Pop" Marks (Lockable castor to front).

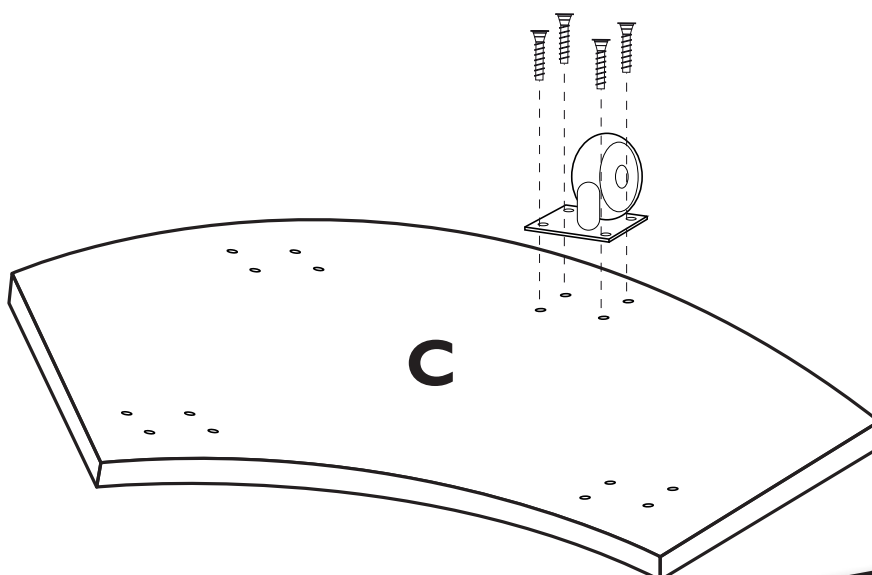

Contact Number  
**0151 479 3030**


## Step 3

Secure end and Divider to bottom with (4) Confirmat Screws.

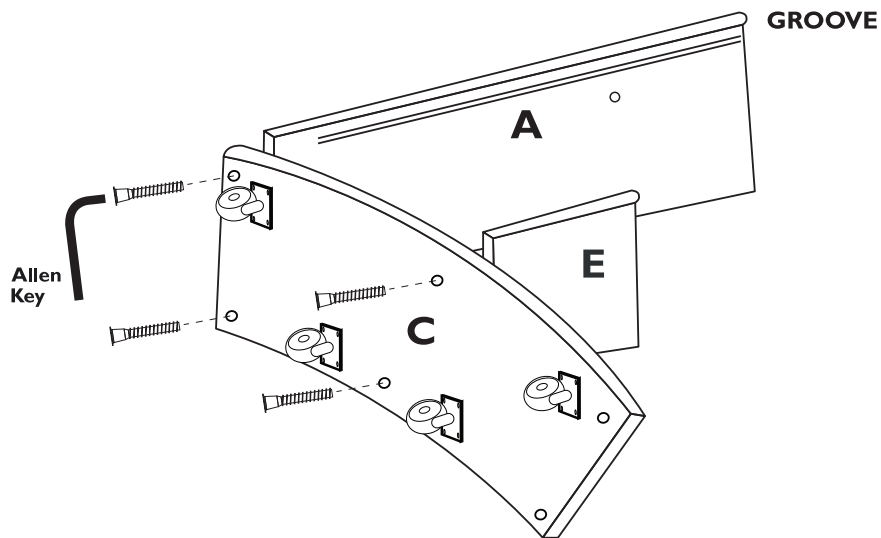


## Step 4

- A) Press Shelf D with dowel in to slot in Divider E.
- Secure to End Panel with (2) Confirmat Screws.
- B) Secure End to Bottom and Shelf with (4) Confirmat Screws.

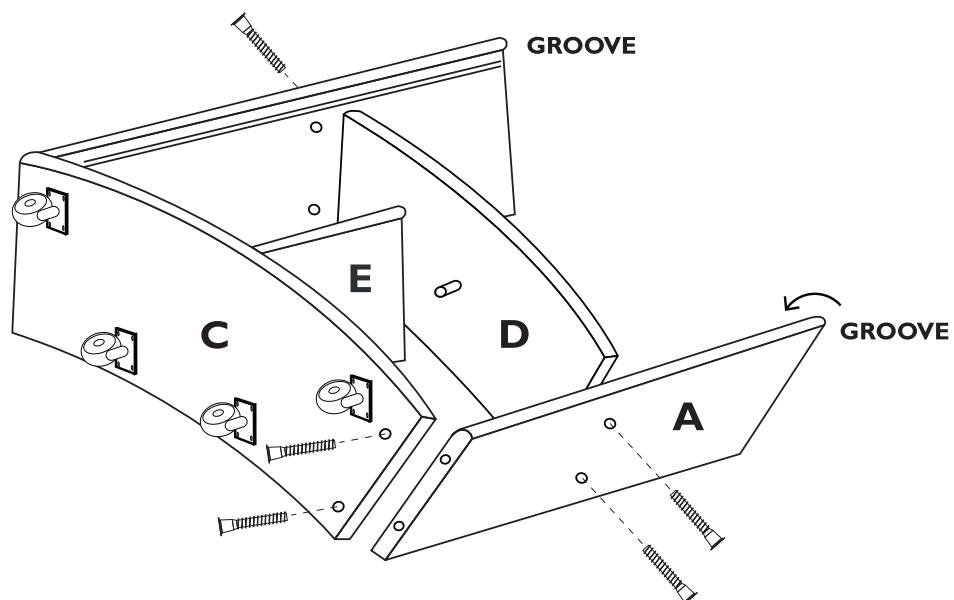

## Step 5

Stand unit upright

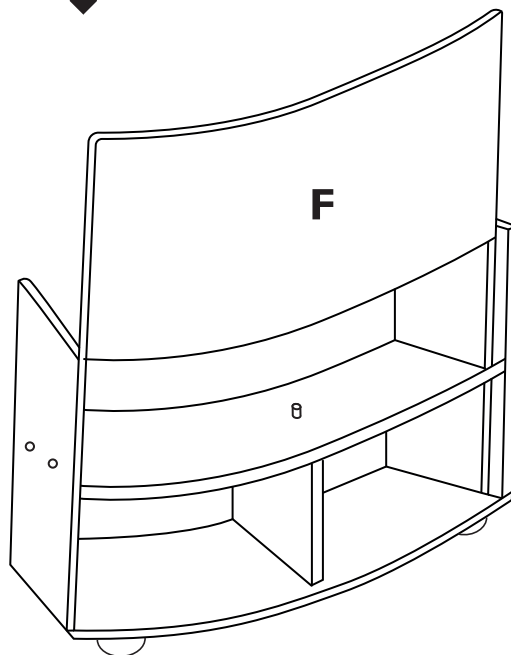

Flex hardboard back into grooves in ends and push down into groove in bottom.


Slacken screws

Slacken screws

## Step 6

A) Press Divider into Dowel ALREADY IN SHELF.

B) Position Top and secure to Ends and Dividers with (6) Confirmat Screws.

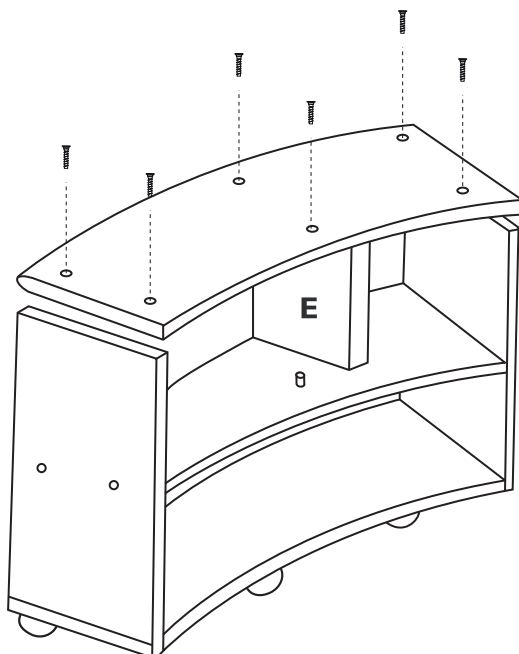


Tighten screw

Tighten screw

**Step 7 (If Required)**

Use Metal Connecting Bolts to join units together.

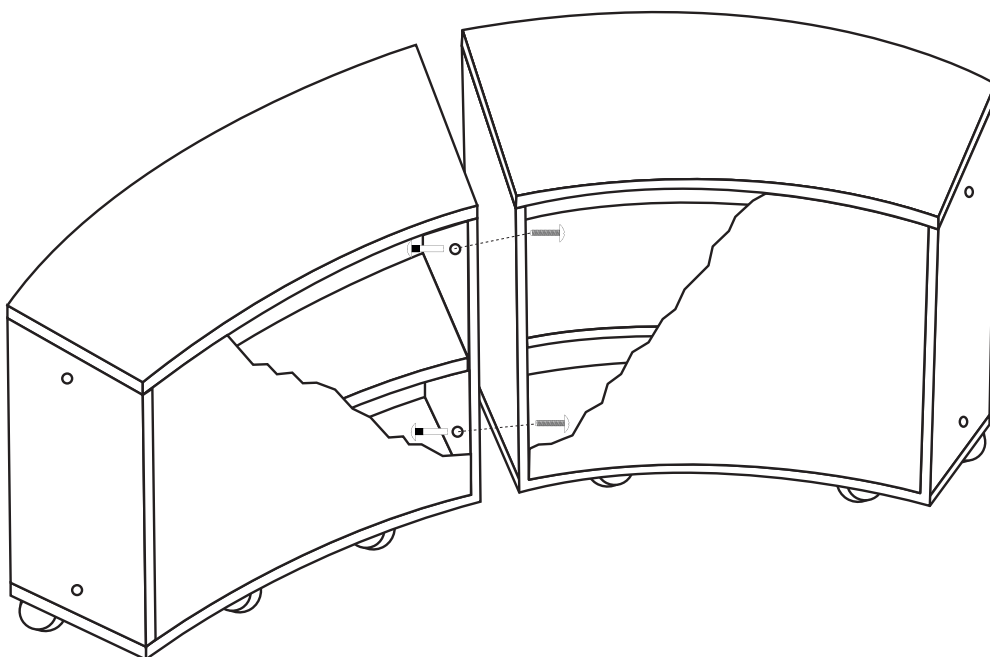

**YOUR QRU/2 UNIT IS NOW COMPLETE**

**Contact Number  
0151 479 3030**